







POWER CORD 2000 LONG OUTSIDE  
(UK PLUG WITH EARTH WIRE)



VIEW A(1/10)



UK PLUG

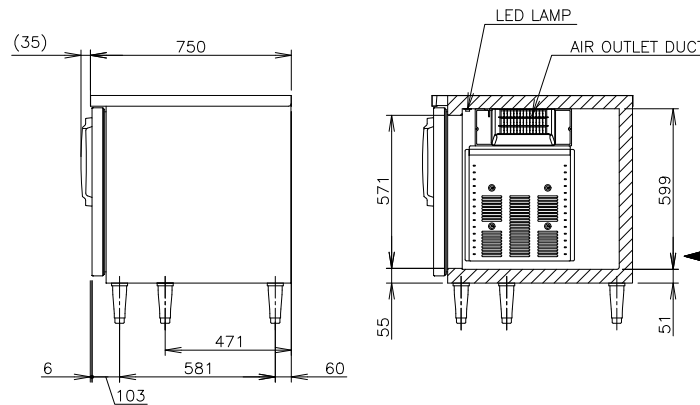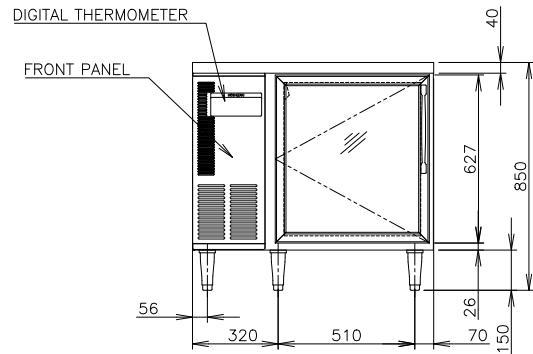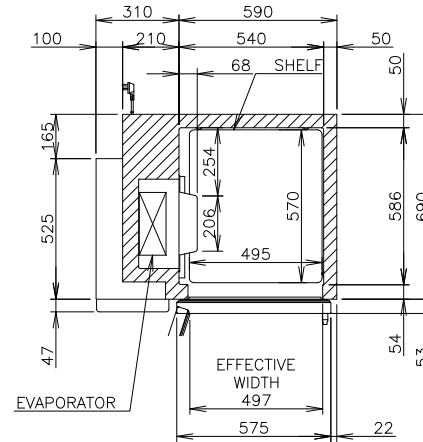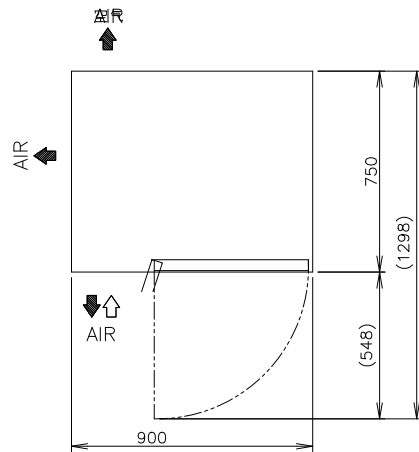

|                               |                                                                          |
|-------------------------------|--------------------------------------------------------------------------|
| ITEM                          | Hoshizaki Undercounter Refrigerator                                      |
| MODEL                         | RT-98MC-SG                                                               |
| POWER SUPPLY                  | 1 Phase 220-240V~ 50Hz Capacity: 0.41kVA (1.86A)                         |
| AMPERAGE                      | Rated *A                                                                 |
| ELECTRIC CONSUMPTION          | Motor 139W(Power Factor 96%) Heater 223W Refrigeration 148W Defrost 190W |
| HEAT REJECTION                | 457W                                                                     |
| POWER CORD                    | 2.0m (UK Plug with Earth Wire)                                           |
| EFFECTIVE CAPACITY            | Net:131.2L/Gross:197L (Based on ISO 22041-2019)                          |
| ENERGY CONSUMPTION            | ***kWh/day (Based on ISO 22041-2019)                                     |
| OUTSIDE DIMENSIONS            | 900mm (W) x 750mm (D) x 850 (-880) mm (H)                                |
| INSIDE DIMENSIONS             | 540mm (W) x 586mm (D) x 599mm (H)                                        |
| EXTERIOR                      | Stainless Steel, Galvanized Steel (Rear/Bottom)                          |
| INTERIOR                      | Stainless Steel, Glass Door                                              |
| INSULATION                    | Polyurethane Foam                                                        |
| INSULATION FOAM BLOWING AGENT | Cyclopentane                                                             |
| REFRIGERATION SYSTEM          | Forced Air Circulation                                                   |
| DEFROST SYSTEM                | Glass Tube Heater                                                        |
| COMPRESSOR                    | Hermetic                                                                 |
| CONDENSER                     | Wire and Tube type, Air-cooled                                           |
| EVAPORATOR                    | Fin and Tube Type                                                        |
| REFRIGERANT                   | R290                                                                     |
| TEMPERATURE CONTROL           | Microprocessor controlled Adjustable from -2 to 12°C                     |
| DEFROST CONTROL               | Microprocessor controlled                                                |
| ELECTRIC CIRCUIT PROTECTION   | Fuse, Earth Wire                                                         |
| COMPRESSOR PROTECTION         | Motor Protector                                                          |
| LEG                           | Plastic Adjustable 150 to 180mm                                          |
| SHELF                         | 2pcs.                                                                    |
| WEIGHT                        | Net: 71kg (Gross: Approx. 83kg)                                          |
| PACKAGE                       | Carton 965mm (W) x 830mm (D) x 845mm (H)                                 |
| ACCESSORIES                   | -                                                                        |
| OPERATING CONDITIONS          | Ambient Temperature:5-38°C<br>Voltage Range:Rated Voltage±6%             |

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow and pipe connections).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 35°C and power supply of 230V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 230V 50Hz.
3. The cabinet temperature range of -2 to 12°C is guaranteed at ambient temperature of 30°C.
4. Product code: T434-V020