

CERTIFICATION



HACCP International



ISO9001


# ICE MATE



## SRM-105A ICE MAKER

ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

### DICE



### KEY FEATURES

#### SAFETY AND HYGIENE ASSURED ICE MACHINE



NSF Certified Material for Bin and Scoop



Detachable Parts for Easy Cleaning



Air Filter Prevent Dust from Entering



Stainless Steel

#### ENERGY & WATER SAVING, QUIET OPERATION




Energy & Water Saving, Quiet Operation

#### EASY MAINTENANCE




IoT




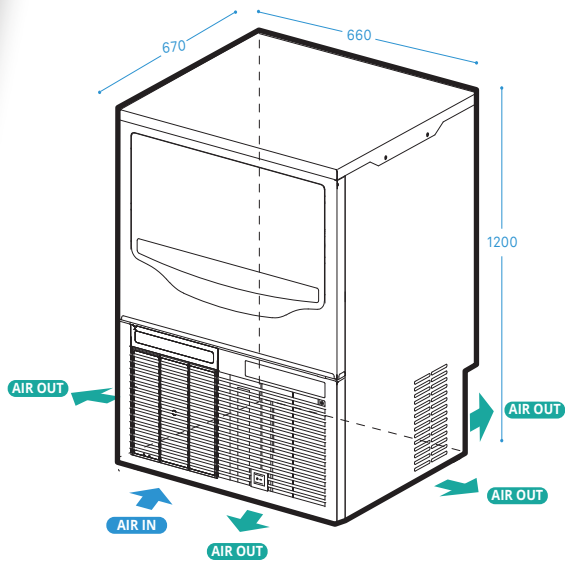


TOP SIDE

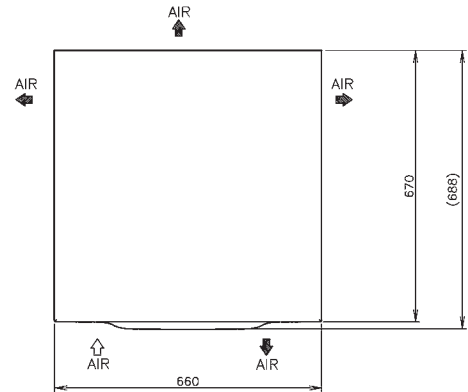


FRONT SIDE

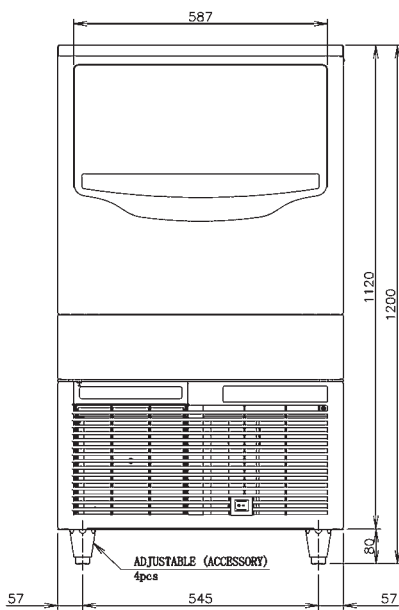

RIGHT SIDE

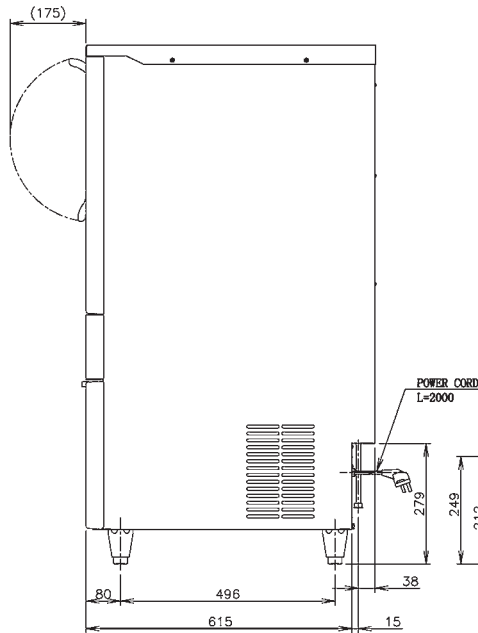

BACK SIDE

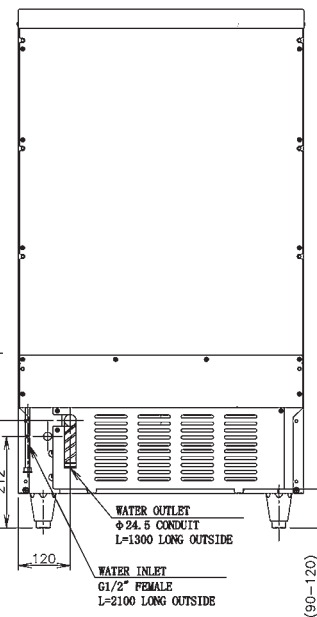

SPECIFICATIONS

Ice Dimensions (W x D x H)	22 x 22 x 22 mm	Water Consumption per 24H	(AT32°C/WT21°C) 0.14m <sup>3</sup> (2.0L / kg Ice)
Outside Dimensions (W x D x H)	660 x 670 x 1200 mm	Ice Production Freeze Cycle Time	(AT21°C/WT15°C) 20 min
Package Dimensions (W x D x H)	Carton: 785 x 860 x 1250 mm	Ice Production per Cycle	(AT21°C/WT15°C) Approx. 1.17kg / 126 pcs
Weight (Net / Gross)	61 kg / 69 kg	<b>OPERATING CONDITIONS</b>	
Amperage / Starting Amperage	3.2A / 15.0A	Voltage Range	198 - 254 V
Electrical Consumption	(AT32°C / WT21°C) 480 W	Ambient Temperature	5 - 38°C
Refrigerant Charge	R404A / 290g	Water Supply	5 - 32°C
Ice Storage Capacity	Maximum 43.6kg	Water Supply Pressure	0.07 - 0.55 Mpa (0.7 - 5.5 bar)
Ice Production per 24H	(AT10°C / WT10°C) Approx. 100 kg (AT21°C / WT15°C) Approx. 90 kg (AT32°C / WT21°C) Approx. 70 kg	Supply Voltage	1/220 - 240V / 50Hz



**HOSHIZAKI**

**HOSHIZAKI MALAYSIA SDN. BHD.**

No. 12, Jalan Penyajak U1/45B. Hicom-Glenmarie Industrial Park, 40150 Shah Alam, Selangor  
TEL (+60) 3 5569 8023 | <https://hoshizaki.com.my/>