CERTIFICATION

HACCP International

ISO9001

ICE MATE

by HOSHIZAKI

SRM-80A

ICE MAKER

ICEMATE is committed to bringing high-efficiency / energy-saving, and high quality ice-making product to people who have dreams and desire to create their own business with the best scientific technology and manufacturing technology.

DICE



KEY FEATURES

SAFETY AND HYGIENE ASSURED ICE MACHINE

NSF Certified Material for Bin and Scoop

Detachable Parts for Easy Cleaning

Air Filter Prevent Dust from Entering

Stainless Steel

ENERGY & WATER SAVING, QUIET OPERATION

Energy & Water Saving, Quiet Operation

EASY MAINTENANCE

IoT

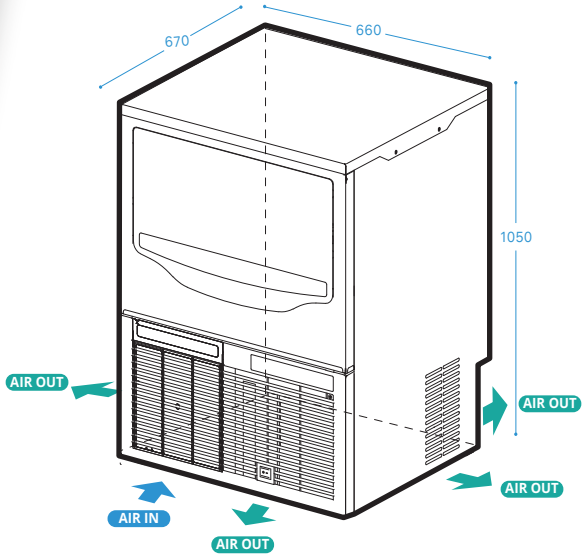

TOP SIDE

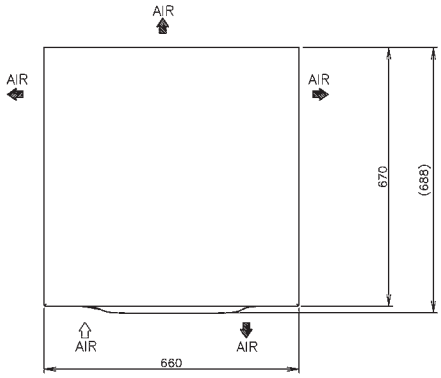

FRONT SIDE

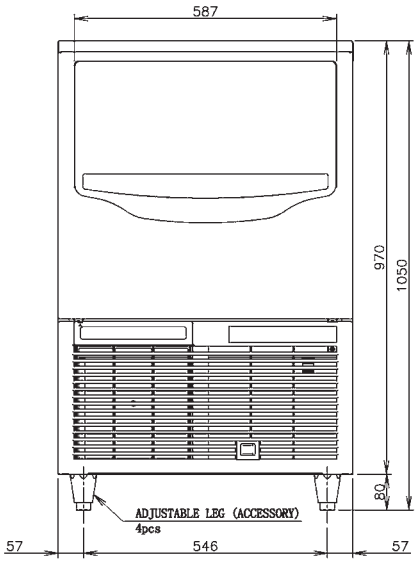

RIGHT SIDE

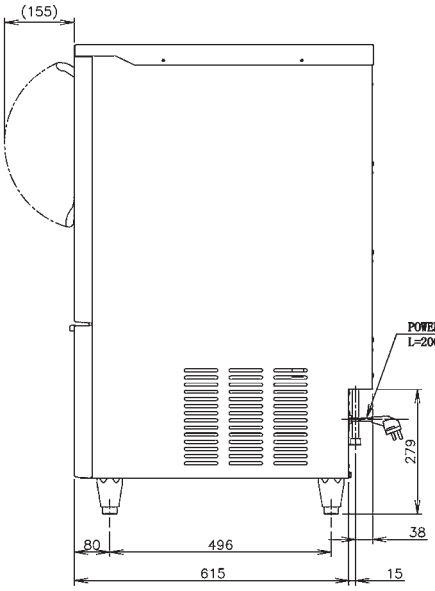

BACK SIDE

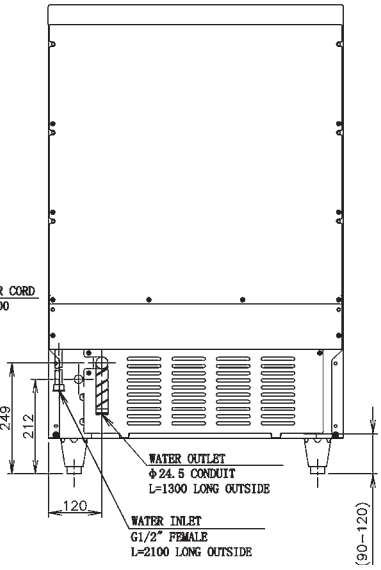

SPECIFICATIONS

Ice Dimensions (W x D x H)	22 x 22 x 22 mm
Outside Dimensions (W x D x H)	660 x 670 x 1050 mm
Package Dimensions (W x D x H)	Carton: 785 x 860 x 1100 mm
Weight (Net / Gross)	56.5 kg / 63 kg
Amperage / Starting Amperage	3.2A / 15.0A
Electrical Consumption	(AT32°C / WT21°C) 450 W
Refrigerant Charge	R404A / 230g
Ice Storage Capacity	Maximum 31.4kg
Ice Production per 24H	(AT10°C / WT10°C) Approx. 80 kg (AT21°C / WT15°C) Approx. 72 kg (AT32°C / WT21°C) Approx. 57 kg

Water Consumption per 24H	(AT32°C/WT21°C) 0.13m³ (2.3L / kg Ice)
Ice Production Freeze Cycle Time	(AT21°C/WT15°C) 16 min
Ice Production per Cycle	(AT21°C/WT15°C) Approx. 0.81kg / 80 pcs

OPERATING CONDITIONS	
Voltage Range	198 - 254 V
Ambient Temperature	5 - 38°C
Water Supply	5 - 32°C
Water Supply Pressure	0.07 - 0.55 Mpa (0.7 - 5.5 bar)
Supply Voltage	1/220 - 240V / 50Hz

HOSHIZAKI

HOSHIZAKI VIETNAM CORPORATION
168/14 Nguyen Gia Tri, Thanh My Tay Ward, Ho Chi Minh City Vietnam 760000
TEL +84 0 916 161 346 | https://hoshizaki-sea.com/