### HOSHIZAKI EUROPE B.V

Burgemeester Stramanweg 101 1101 AA Amsterdam, The Netherlands

Tel: +31 20 691 8499 e-mail: sales@hoshizaki.nl web: www.hoshizaki-europe.com



Code:	COLD UNITS	Model:	
146951010	BAKER GA 950 RETARDER PROVER	BAKER GA 950	











### **MAIN FEATURES**

- \* 304 quality stainless steel
- \* Operating temperature -25/+40 °C
- \* The storage can be used as a freezer, refrigerator and prover which mean fermentation cabinet (for bakery products)
- $* \ \ \text{Multifunctional operating system which as a freezing, storage, thawing, holding and proving}$
- \* With special digital thermostat provides set date, time, language options, seasonal options and also preconfigured programmes can be set depend on these features
- \* The air circulation system is key to maintain correct and uniform temperature and humidity levels inside the cabinet
- $* \ \ \text{Maximum internal capacity minimal temperature increase during defrost}$
- \* Most efficient air distribution inside with a specially designed air channel
- \* The inner lower base which are moulded comply with the highest hygiene standards with rounded corners are made of stainless steel
- \* Automatic fan cutout switch
- $* \ \ \text{Wide magnetic removable gasket with triple insulation area provides an effective seal which reduces heat loss}$
- \* 40-42 kg/m3 density environment friendly HFC-Free Polyurethane insulation for low energy consumption (80 mm)
- \* Protecting Class (IP21)
- \* Ventilated cooling design
- \* Reversible door allows the appliances to be adapted to any individual installation site
- \* 25 inner rails for each side inside the cabinet

	DI	ГΤ	<b>∩</b>	NI
v			v	IN IS

- \* Leg Option: Leg
- \* Plug Option: UK/EU
- \* Door Option: Left Hinged / Right Hinged

## ACCESSORIES

- \* Master Key
- \* Set of Baker 950 Type Rail
- \* Set of Stainless Steel Leg

### **STANDARDS**

- \* EN 60335-1 European Standard relating to safety of household and similar electrical appliances
- \* En 60335-2-89 European Standard relating to particular requirements for commercial refrigerating appliances with an incorporated or remote refrigerant unit or compressor





# HOSHIZAKI EUROPE B.V


Burgemeester Stramanweg 101 1101 AA Amsterdam, The Netherlands Tel: +31 20 691 8499 e-mail: sales@hoshizaki.nl web: www.hoshizaki-europe.com




Code:	COLD UNITS	Model:
146951010	BAKER GA 950 RETARDER PROVER	BAKER GA 950

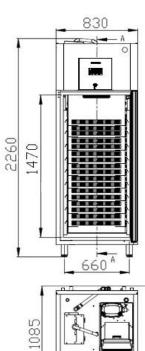

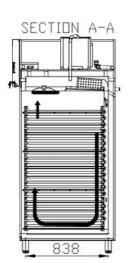





DIMENS	SIONS (Net)		DIMENSION	IS (Shipping)
* Width (mm):	830	*	Width (mm):	920
* Depth (mm):	1085	*	Depth (mm):	1190
* Height (mm):	2260	*	Height (mm):	2320
* Weight (kg):	173	*	Weight (kg):	190
		*	Volume (m³):	2,54
	TECHNICAL SP	ECIF	CICATIONS	
* Gross Volume:	950 L	*	Cooling Temperature:	-25 / +40 °C
* Climate Class:	5/T (5L1)	*	Cooling Gas Type:	R290
* Power - Current	1,8 kW - 8 A	*	Supply Voltage:	230V / NPE 50 Hz
* Cooling Capacity:	674 W (-30° / +45°)	*	<b>Protection Class:</b>	IP 21